




# FINISHING OVEN

## CONCEPT

*Perfect way to finish or broil...  
with precision and control*

- Electric finishing ovens with Quartz (Q) or Vitroceramic (VC, VCE and VCH) heating elements
- Models with adjustable movable top or fixed top and adjustable shelf
- Instant-on* and *infinite power setting* features for movable top VC, VCE and VCH models
- VCE model includes digital controls and 30% stand by power feature (SEM-60VC only)
- Full or partial power
- Pull-out bottom tray with wire rack
- Free-standing or wall-mounted (kit optional)
- 4" legs (included) or 1" adjustable feet (optional) must be installed under unit
- Not to be installed over high heat or open flame without insulated shelf - consult factory (oversize shelf by 2" each side and 2" at front)

Quartz

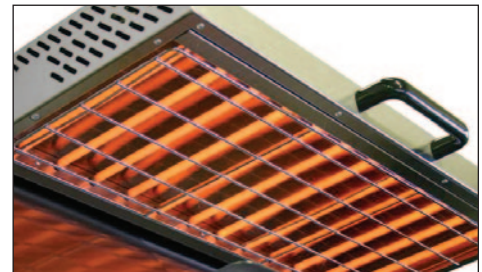

Vitroceramic



**VCE Includes Instant-on and Electronic Control Features**



## PRECISION

**SEM-60/80**

208/240V



VC Shown

**FEATURES:**

- movable top
- Quartz heating elements
  - 8(SEM-60); 12(SEM-80)
- Vitroceramic heating zones
  - 2(SEM-60); 3(SEM-80)

## IMPERIAL

**SEF-80**

208/240V



**FEATURES:**

- adjustable intermediate wire shelf
- 12 Quartz heating elements
- 2 zone heat control




100 NIAN TIC AVENUE; SUITE 104 PROVIDENCE, RI 02907  
TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com  
www.equipex.com




SEM-60 24" / SEM-80 32"

# FINISHING OVENS

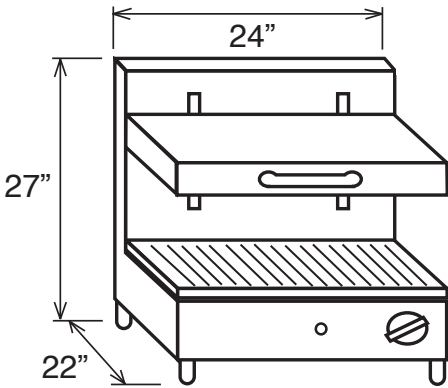


**SEM-60 / SEM-80**

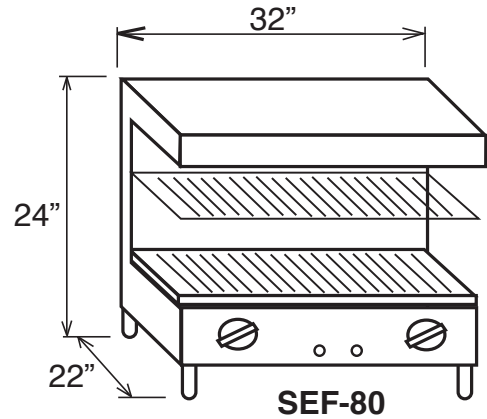

**SEF-80**

| Minutes | Range 1 Quartz °F | Range 2 Vitro Ceramic °F |
|---------|-------------------|--------------------------|
| 0       | 77                | 77                       |
| 1       | 253               | 174                      |
| 2       | 356               | 295                      |
| 3       | 390               | 392                      |
| 4       | 410               | 489                      |
| 5       | 473               | 572                      |
| 6       | 493               | 648                      |
| 7       | 487               | 700                      |
| 8       | 500               | 740                      |
| 9       | 513               | 770                      |
| 10      | 554               | 842                      |
| 11      | 572               | 896                      |
| 12      | 590               | 968                      |
| 13      | 608               | 1004                     |
| 14      | 626               | 1040                     |
| 15      | 635               | 1058                     |

Note: Temperature recorded on plate shelf with movable top in the lowest position

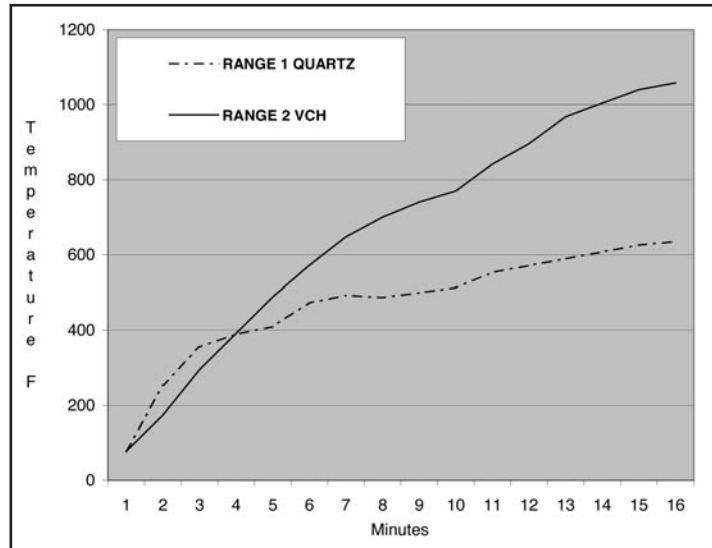

## SPECIFICATIONS

INSTALLATION CLEARANCE: 4" EACH SIDE

| MODEL     | ELECTRICAL  | DIMENSIONS W x D x H                  | WORK SURFACE W X D | SHIPPING WEIGHT lbs. | NEMA PLUG                    |
|-----------|---|---------------------------------------|--------------------|----------------------|------------------------------|
| SEM-60Q   | 208/240V, 1PH<br>2.8KW, 12/14 Amps  | 24" x 22" x 27"<br>(includes 4" legs) | 24" x 15"          | 180                  | 6-20P                        |
| SEM-60VC  | 208/240V, 1PH<br>3.0KW, 13/15 Amps  | 24" x 22" x 27"<br>(includes 4" legs) | 24" x 15"          | 190                  | 6-20P                        |
| SEM-60VCE | 208/240V, 1PH, 3.0KW,<br>13/15 Amps   | 24" x 22" x 27"<br>(includes 4" legs) | 24" x 15"          | 190                  | 6-20P                        |
| SEM-80Q   | 208/240V, 1PH<br>3.9KW, 17/19 Amps<br>-----<br>208/240V, 3PH<br>3.9KW, 16/18 Amps | 32" x 22" x 27"<br>(includes 4" legs) | 32" x 15"          | 195                  | L6-30P<br>-----<br>Cord only |
| SEM-80VC  | 208/240V, 1PH<br>4.5KW, 19/22 Amps<br>-----<br>208/240V, 3PH<br>4.5KW, 18/20 Amps | 32" x 22" x 27"<br>(includes 4" legs) | 32" x 15"          | 205                  | L6-30P<br>-----<br>Cord Only |
| SEM-80VCH | 208/240V, 1PH<br>7500W, 28/32 Amps<br>-----<br>208/240V, 3PH<br>7500W, 18/20 Amps | 32" x 22" x 27"<br>(includes 4" legs) | 32" x 15"          | 205                  | 6-50P<br>-----<br>Cord Only  |
| SEF-80Q   | 208/240V, 3PH<br>5KW, 13/15 Amps  | 32" x 22" x 24"<br>(includes 4" legs) | 32" x 14"          | 170                  | Cord Only                    |

\*All equipment must be plugged into a dedicated circuit of the proper ratings.

**WARRANTY: Limited one year parts and labor**



100 NIANTIC AVENUE; SUITE 104 PROVIDENCE, RI 02907  
 TEL: (401)273-3300 FAX: (401)273-3328 E-mail: sales@equipex.com  
 www.equipex.com



Intertek  
UL197



Intertek  
NSF-4